




FACE RECOGNITION ACCESS PORTAL SYSTEM

With optional barcode & RFID reader

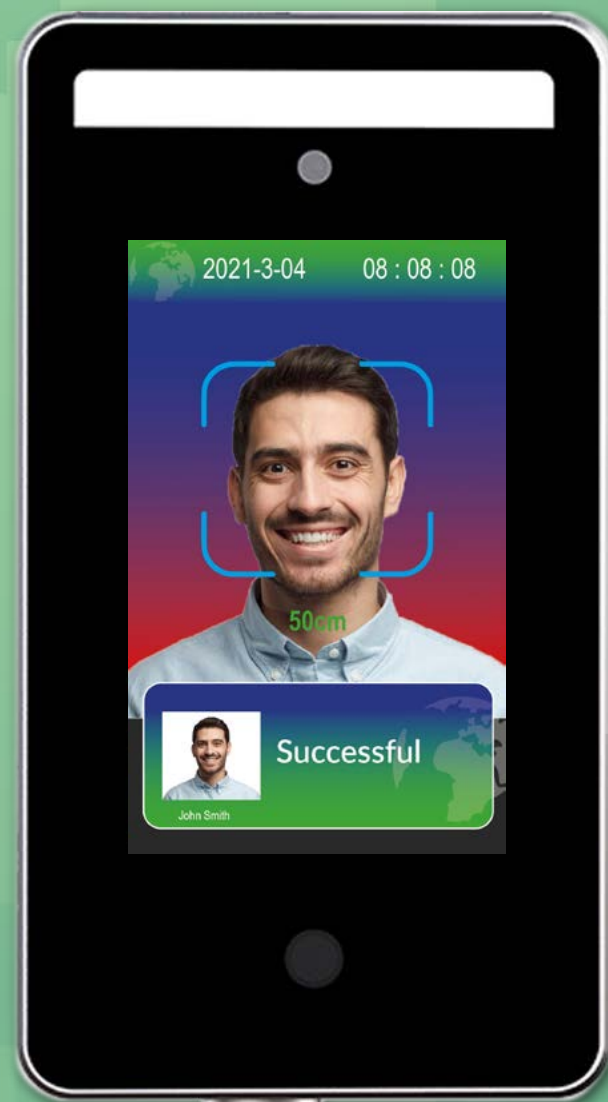

Features

- Ultrasonic Real-time Dynamic Distance Sensor, Applicable Range from 1ft to 6ft 6in
- Anti-back-lighting Wide Dynamic Camera, Read Range 6ft 6in
- 10,000+ Database, Likeness Recognition Algorithm*
Read Speed at 0.4 sec
- Attendance Report
(Local Download/PC software download)
- USA Sales/Distribution and Tech support
- UK Technical Support
- Installation support
- Training available if required
- Secure GDPR/HIPPA compliant facial recognition system
- Network compatible – both wired and wireless
- Multiple synced units on one network
- Link via API or custom interface to existing management systems
- RFID and Barcode reader options
- 24 months manufacturers warranty

* Optional under GDPR rules

Features



Mask
Detection



Facial
Recognition*



7" Touch
Panel



IPS Wide
Angle Screen



Ultrasonic
Distance
Sensor



Recognition
Speed



6ft 6in
Measure
Distance



WIFI
Support

* Optional under GDPR rules

Product Module



* Optional under GDPR rules

Product Module



Desktop Model

Product Size



Product Options



Wall Hanging



Free Standing

Free Standing

Specifications



- One PC controls up to 200 devices
- Supports offline operation
- Attendance at a glance

Data Management

POWER	DC 12V/3A
CPU	Rk3288 quad-core 1.8G
RAM	DDR3 2G
FLASH	EMMC8G
OS	Android
PANEL	7 inch IPS 800x480 Solutions
TOUCH PANEL	G+G Capacitative Touch Panel
CAMERA	High Dynamic Range 2Mega-pixel Camera
BACK UP LIGHT	White, RGB camera back up light
SPEAKER	3W 4Ω
FACE RECOGNITION*	10,000+ Database, Recognition Algorithm, Recognition Speed: 0.4 sec
MATERIAL	Aluminium alloy and 304 stainless steel
SUPPORT BRACKETS	Wall hanging bracket. Turnstile bracket. Free-standing bracket
DIMENSIONS	Dimensions 6.2" wide x 12.6" high x 1.4" deep
APPLICATION	Time attendance. Turnstile. Door access control (OEM Design is available)

* Optional under GDPR rules